EN

1. Packing List

- Prestigio car DVR
- Suction mount
- Car charger
- 3.6m power cable
- 15cm data cable
- Quick start guide
- Warranty Card

2. Device Overview

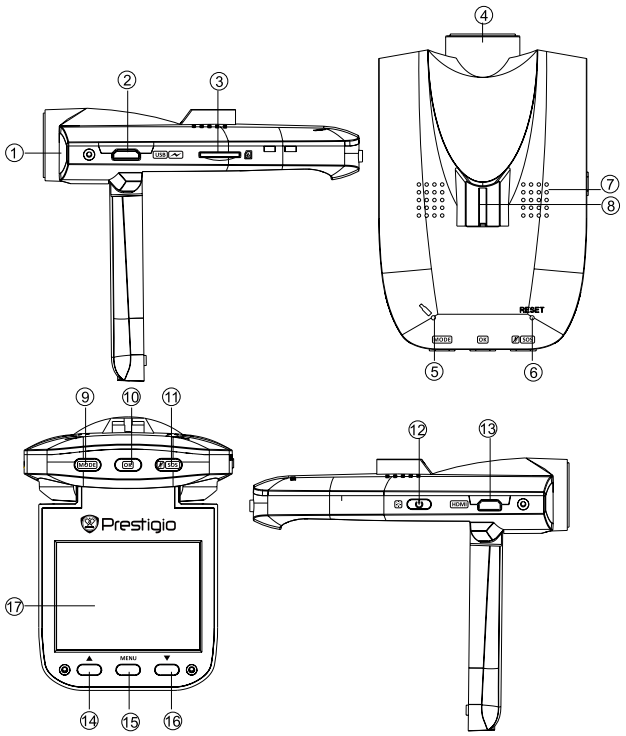

1	LED light (Night mode)	10	OK button
2	USB port	11	Mic /SOS button
3	SD card slot	12	Power button
4	Lens	13	HDMI port
5	MIC	14	Up button
6	Reset	15	Menu button
7	Speaker	16	Down button
8	Mount hole	17	LCD display
9	Mode button		

EN

Getting started

3. Power on/Power off

- Position the device in the vehicle using the suction mount and press the Power button to turn it on. To power off the device press the button again.
- You can also connect the device to the car charger. It will automatically turn on and start recording when the car engine starts. When the engine stops, the device will automatically save the last file and turn off.

4. Charging

- Using the USB cable: Connect the device to the USB port of a Computer/Laptop
- Using the car charger: Connect the device to the car charger. The device will start charging after the car engine is turned on. The device will automatically turn on and start recording. When the engine stops, the device will automatically save the last file and turn off.
- Normally it takes approximately 2-3 hours to fully charge the device. Operating the device while charging with the Car Charger may extend the time of full charge.

Note:

Before using the device for the first time, please, connect it to the PC or notebook using the USB cable provided to fully charge the battery. The battery is completely charged in 2-3 hours.

5. Inserting the Micro SD-card

- Before starting video recording, please, insert a Micro SD card (not included) into the Micro SD card slot in the device.
- To extract the Micro SD card slightly push it inside the device, and remove.

Note:

After inserting the Micro SD card the device will automatically recognize it as default storage and all the data will be saved on this card.

6. Recording

- Connect the device to car charger, when the car engine is turned on after 5 seconds, the device will start loop video recording. When the car engine stops, the device will save the last file and turn off after 15 seconds.

Notice:

» Press **OK** button on loop video recording, the current file will be saved and the device enters to standby mode.

» When the Micro SD card is full, the device will delete the first unlocked video file automatically.

7. Taking pictures

- Press the **Mode** button to select the picture mode.
- Press **OK** button to take photos, taken photos are saved on Micro SD Card.
- Press the **Menu** button in the picture mode, and then press up/down button to set resolution and time.

Home screen

8. Main menu

The following symbols may be displayed on the screen:

	Video recording mode		Storage card
	Picture mode		Sound recording mode

Settings

9. Video Menu settings

Turn on the device and make sure the Video mode is selected.

Note:

To select Video or Picture Mode press the **Mode** button. The appropriate symbol will be displayed in the top left corner of the screen.

- Press **Menu** button to enter Settings. Press up/down button to select the option and press **OK** button to enter the select mode, press up/down button to select and press **OK** again to set the value.

The following options list is available in the Video menu:

- **Resolution**: Select the video image size from 1080HFD 1920*1080 /1080P 1440*1080 /720P 1280*720 30fps.
- **Loop recording**: Select the loop recording from off/1 min./2 min./ 3 min./ 5 min./10 min.
- **Exposure**: Select the exposure from +2.0,+5/3,+4/3,+1.0,+2/3, +1/3, +0.0, -1/3,-2/3,-1.0,-4/3,-5/3,-2.0
- **Motion Detection**: In the standby mode, press **Menu** button to set the function on, the device will start video recording automatically if it detects a moving object and stop recording when there is no movement detected.
- **Record Audio**: Select to turn the record audio on or off
- **Date Stamp**: Select to turn the date stamp on or off.

10. Picture Menu settings

Turn on the device and make sure the Picture mode is selected.

Note:

The appropriate symbol will be displayed in the top left corner of the screen.

- Press **Menu** button to enter Settings. Press up/down button select the option

The following options list is available in the Picture menu:

- **Capture Mode**: Select the capture Mode from Single /2S Timer/ 5S Timer/ 10S Timer
- **Resolution**: Select the picture image size from 12M 4000*3000/ 10M 3648*2736/ 8M 3264*2448/ 5M 2592*1944/ 3M 2048*1536/ 2M HD1920*1080/VGA 640*480/ 1.3M 1280*960.

- **Sequence**: Select to turn sequence on or off.
- **Quality**: Select quality from Fine / Normal / Economy
- **Sharpness**: Select sharpness from Strong / Normal / Soft
- **White Balance**: Select white balance from Auto / Daylight / Cloudy / Tungsten / Fluorescent
- **Color**: Select color from color/ Black & white / Sepia
- **ISO**: Select ISO from Auto/100/200/400
- **Exposure**: Select the exposure from +2.0,+5/3,+4/3,+1.0,+2/3, +1/3, +0.0,-1/3,-2/3,-1.0,-4/3,-5/3,-2.0
- **Date Stamp**: Select to turn date stamp on or off and set date and time.

11. General settings

Double Press **Menu** button to enter Settings, and then press **UP**, **DOWN**, **OK** button to select Settings. The following settings are available:

- **Date/Time**: Select the date and time display format, MM/DD/YY
- **Auto Power off**: Make the device automatic power off when it is not in use.
- **Beep Sound**: Select to turn beep sound on or off,
- **Language**: Select the desired language from the list.
- **TV Mode**: Select TV mode from PAL / NTSC,
- **Frequency**: Select frequency from 50HZ / 60HZ.
- **LCD Off**: Select to turn LCD on or off.
- **Format**: Select to format the Micro SD Card.
- **Default Setting**: Select if return menu setting to defaults or not.
- **Version**: Displays the current system version.

12. Playback mode

Press **Mode** button to enter playback mode. The last recorded file will be displayed. Press the up/down button to view the files.
Press the OK button to play the files. Meantime, under play mode, press up/down to FORWARD / BACKWARD (1/2, 1/4) the file, then press **OK** button to pause. Press the **Menu** button back to the playback menu. To enter menu options press **Menu** button, the following settings are available:

- **Delete**: Select the file / files you want to delete.
- **Protect**: Select the file you want to lock or unlock.
- **Slide Show**: Select slide show time;
- **Thumbnail**: Select to enter the file thumbnail mode.
- **Volume**: Select the playback volume.

13. USB connection

To download registered files on your PC/notebook, please, connect the device to the PC or notebook via USB-cable provided. After connecting the device to the PC the USB menu will be displayed, containing Mass Storage and PC Camera. Select Mass Storage and the device will appear in “My computer” as the removable disk. All registered files are stored in DCIM folder, videos are stored in AVI format, and the pictures are stored in JPG format. You can now download the files from the device.

EN

14. PC Camera Mode

Connect the device to a computer via USB. It will show **Mass Storage** and **PC Camera** in the device, Press up/down to select and then press OK to enter PC CAM mode, then you can use the device as a PC Camera.

15. Playback on TV

To playback the recorded files on TV connect the device to your TV with the HDMI cable (not included in the package) and follow the TV instructions or refer to your TV user manual.

Notes:

- Please insert the Micro SD card before recording. Micro SD card is not included in the package.
- When the Micro SD card is out of memory, it will automatically erase the oldest files and start recording from the beginning (only if the Recycle option is activated).

Safety precautions

Please observe all safety precautions before using Prestigio Roadrunner 515. Please follow all procedures outlined in this manual to correctly operate the device.

- Do not attempt to disassemble or alter any part of the device that is not described in this guide.
- Do not place the device in contact with water or any other liquids. The device is NOT designed to be liquid proof of any sort.
- In the event of liquid entry into interior of device, immediately disconnect the device from the computer. Continuing use of the device may result in fire or electrical shock. Please consult your product distributor or the closest support center.
- To avoid risk of electrical shock, do not connect or disconnect the device with wet hands.
- Do not place the device near a heat source or directly expose it to flame or heat.
- Never place the device in vicinity of equipments generating strong electromagnetic fields. Exposure to strong magnetic fields may cause malfunctions or data corruption and loss.

Technical Specifications

Recording	1080HFD 1920*1080 /1080P 1440*1080 /720P 1280*720 30fps
Video format	AVI
Picture format	JPG
Power source	Rechargeable battery
Interfaces	HDMI, USB, SD card (Supports max 32GB, high-speed SD card recommended)
Microphone	Built-in

EN

Operating temperature	0°C ~ 45°C

Video Storage Capacity

Storage card(G)	1920*1080 (1080FHD)	1280*720 (720P 50 fps)	1280*720 (720p 30fps)	2592 X 1944 (5M)	3264 X 2448 (8M)	4032X 3024 (12 M)
16G	100 min	76 min	124 min	16260 photos	10252 photos	6824 photos
8G	50 min	38 min	62 min	8130 photos	5126 photos	3412 photos
4G	25 min	19 min	31 min	4065 photos	2563 photos	1706 photos
2G	12 min	9 min	15 min	2032 photos	1281 photos	853 photos
1G	6 min	5 min	8 min	1016 photos	640 photos	426 photos

Disclaimer

If device has been damaged by liquid (for example, water, coffee or a soft drink, etc.), the service for such liquid damage is not covered by the Prestigio two (2) years limited warranty.

CE As the Prestigio products are constantly updated and improved, your device's software and hardware may have a slightly different appearance or modified functionality than presented in this Quick Start Guide.

Prestigio hereby states that this Roadrunner complies to basic requirements and another relevant regulations given by the EU directive1999/5/EC. Full version of the declaration of conformity is available on http://www.prestigio.com/compliance.